

IMx

4836L Pro Grapple

ImpleMax™

ATTACHMENTS



Fits: Skidsteers, Front-End-Loaders

Applications: Arborcare, Landclearing, Construction, Landscaping, Forestry

IMx 4836L Pro Grapple™
Skidsteer & Articulated Loader Grapple

The IMx 4836L Pro Grapple is your ultimate answer to costly labor in tree removal and landclearing. Mounted on a skidsteer or other loader, this incredibly versatile attachment can give you the edge to perform a faster, cleaner and more efficient operation – all with a single operator. You'll send the savings directly to your bottom line!

Beyond Any Ordinary Grapple Attachment

- Large 4 ft. opening hangs right in front of you
- Grab loads from even the most difficult angles
- Excellent visibility with low-angled, narrow boom design
- Carry material off the ground with built-in heeling bar
- Skid loads that exceed your lift capacity

Bring New Capabilities To Your Business

- Carry material in-line with your machine
- Work easily in narrow spaces other machines can't
- Feed limbs & trees directly into chipper chutes
- Load truck-length logs end-wise into chip truck bodies

Choose Equipment That Pays For Itself Quickly

An IMx Pro Grapple may cost more at first, but you'll get durability and quality you won't find in other attachments. For example, our coupler bracketry uses 1/2" thick catch plates that won't bend, break or wear out.

"I hemmed and hawed about the price, but the unit was paid for after the first few jobs and it has more than exceeded my expectations"
- Bob Coleran, Family Tree Service, Hanson, MA

When you're handling logs, brush or other materials there is simply nothing like an ImpleMax Pro Grapple.

Work Safely Safety begins with a thorough understanding of the equipment. Always make sure that you and your operators have carefully read and understood the operator's manual(s) for this implement and the tractor on which it will be used. Review and understand all safety decals. Never use this equipment without shields, protective devices and structures in place.

Specifications



Type:	Skidsteer or Front-End-Loader
Length Overall:	53"
Compatibility:	Available in standard skidsteer quick-tach or custom-built to machine manufacturer's quick-tach or pin-type mounts*
Boom:	1/4" A36 structural steel plate form fabricated for added strength
Swivel Linkage:	3/8" A36 structural steel with 2-0" diameter 4140 chrome moly shaft connection to boom
Grapple Head:	1/4" T1 (100,000 lb. yield strength)
Tongs:	3/16" plate box construction for added strength with heavy wall tube reinforcing around loaded pins
Cylinders:	(2) double-acting, 3000 psi-rated, tie-rod type: 2-1/2" bore with 10" stroke and 1-3/8" diameter rod
Flow Divider:	3000 psi-rated cartridge-type matched to machine psi & gpm
Hoses:	3500 psi-rated, double wire braid sheathed in fitted nylon abrasion resistant sleeving.
Finish:	Painted in rust-inhibitive prime coat and durable enamel topcoat
Weight:	640 lbs.

* Standard pricing does not include additional charges for custom



"We've carried 15 inch trees, 40 feet long with all the limbs, 1/4 mile to the chipper with the grapple. It saved time, kept the wood clean and saved the chipper blades. By hand, we would fill a 12 yard chip truck, four times a day. Now we can do over 13 loads in the same amount of time, a big cost savings."

- Russell Hodge, Hodge Tree Service, Hobart, IN.

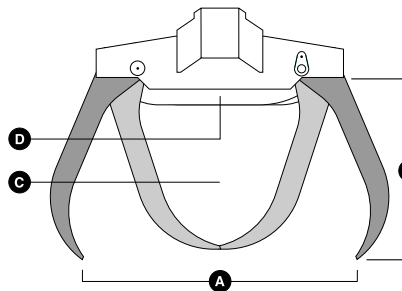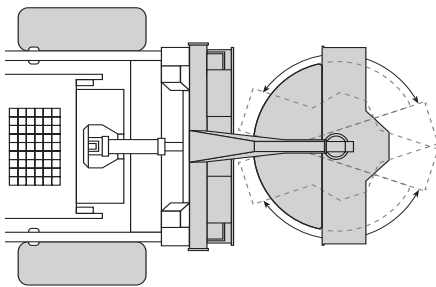

- A** Max. Opening Width: 48"
- B** Max. Opening Height: 36"
- C** Enclosure Area: 6.94 sq. ft.
- D** Min. Stem Diameter: 0.0"

For more information contact your local dealer or:

800-587-6656 (24 hrs.)

www.implemax.com
email: sales@implemax.com

ImpleMax Equipment Co., Inc.

P.O. Box 549
1408 Gold Avenue, No.1
Bozeman, MT 59771-0549

Design, materials, and/or specifications are subject to change without notice and without liability therefor.
ImpleMax and IMx are trademarks of the ImpleMax Equipment Co., Inc.